


ALTERNATING




ASSOCIATED CARPETS[®]

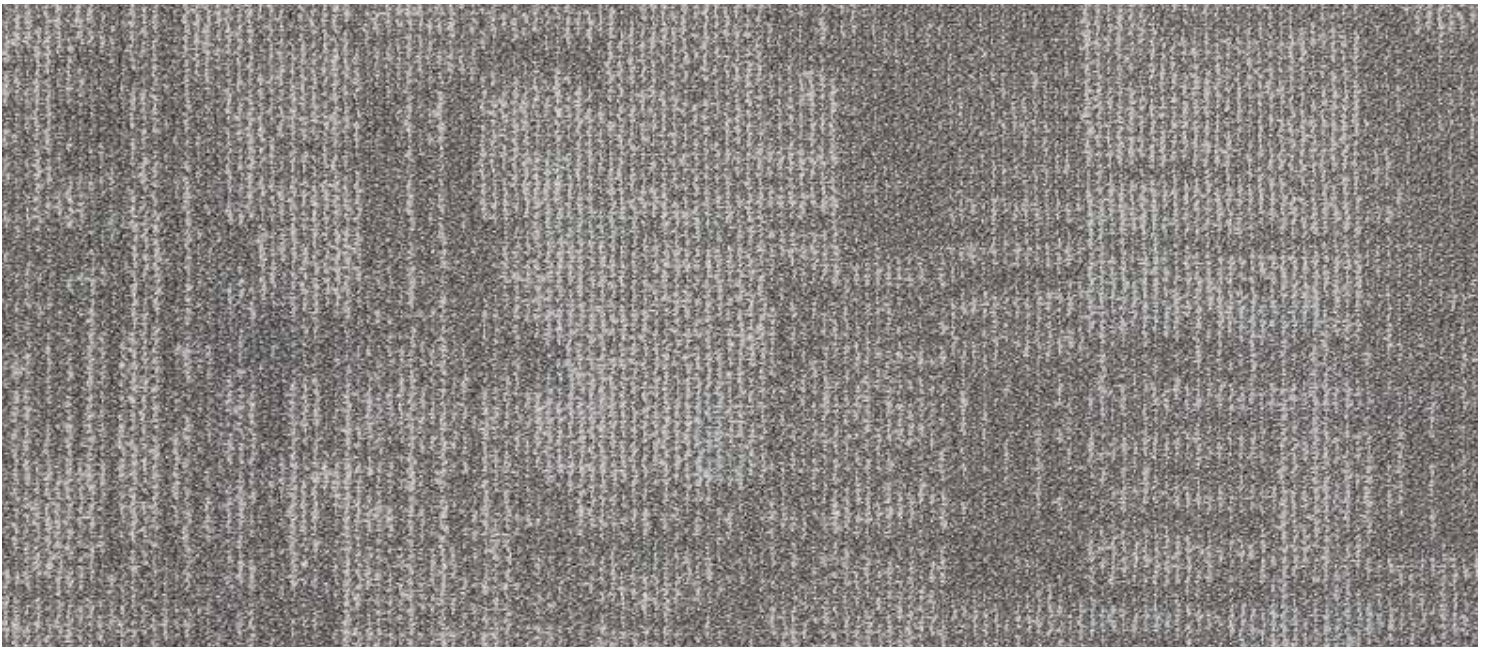

ALTERNATING 04



ALTERNATING 05

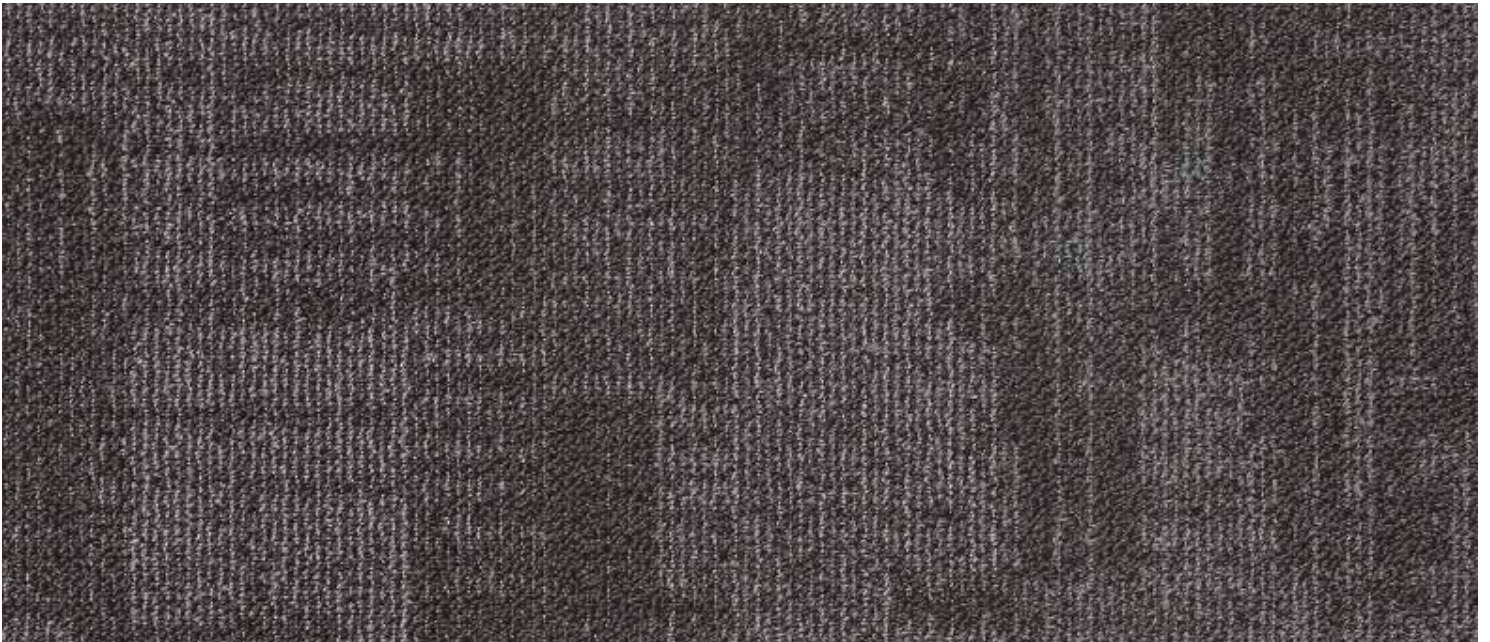

ALTERNATING 06



Product Name:	Alternating
Construction:	Multi-level loop
Yarn Type :	100% Universal nylon 6
Dye Method:	100% Solution Dyed
Machine Gauge:	47.2 per 10cm
Stitches:	39.4 per 10cm
Pile Height:	4mm(±0.5mm)
Total thickness:	5.5mm (±0.5mm)
Pile Weight:	576 g/m2
Total weight:	3300±100 g/m2
Primary Backing:	Non Woven Synthetic
Second Backing:	Bitumen
Tile Size:	50cm×50cm
Area of use:	Heavy commercial
Installation Method:	Monolithic, Quarter turn, Ashlar and Brick
Packing:	20 tiles/carton (5sqm/Carton)
Flammability:	Passes (ASTME648-10) Class I
Smoke Density	Passes ASTM E 662 less than 450
Static Propensity:	Passes AATCC-134 less than 3.5KV
Formaldehyde Purification:	Passes JC/T 1074-2008 class I
Colorfastness to Crocking	Rating 5, AATCC Test Method 165
Colorfastness to Light	Rating 5, AATCC Test Method 16.3

